


TRIBHUVAN UNIVERSITY
INSTITUTE OF ENGINEERING
Examination Control Division
2080 Chaitra


Exam.	Regular		
Level	BE	Full Marks	80
Programme	BEX, BCT, BME, BAM, BIE	Pass Marks	32
Year / Part	II / II	Time	3 hrs.

Subject: - Electrical Machines (EE 554)

- ✓ Candidates are required to give their answers in their own words as far as practicable.
- ✓ Attempt All questions.
- ✓ The figures in the margin indicate Full Marks.
- ✓ Assume suitable data if necessary.



1. a) What is Flemming's right hand rule? Describe the construction details of DC generator with clear diagram and also derive the emf equation of DC generator. [2+4+2]
- b) State Ohm's law for magnetic circuit. For the given magnetic circuit, neglecting magnetic leakage and fringing, calculate air gap flux, flux density and magnetic field intensity at the air gap. Given that relative permeability of ferromagnetic material is 1200 and all dimensions are in cm. [2+6]

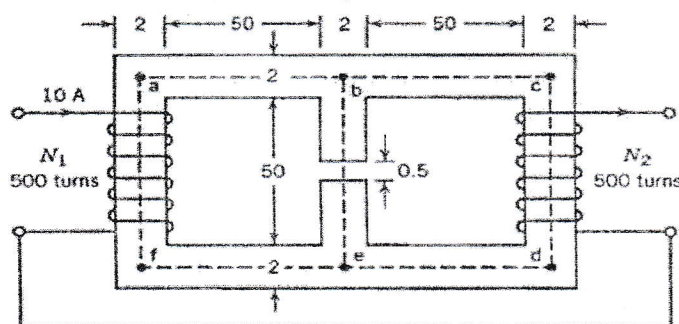

2. a) Why transformer is generally rated in KVA and not in kW? Explain factors affecting the efficiency of transformer with proper mathematical justification and graph. [2+6]
- b) A single-phase transformer working at unity pf has an efficiency of 90% on both half load and at full load of 500kW. Determine: [3+3+2]
 - i) iron loss
 - ii) Full load copper loss
 - iii) maximum efficiency
3. a) Describe the working principle of three phase induction generator. Also explain how voltage build up in it. [4+4]
- b) A 230V, dc shunt motor takes 5A at no load. The resistance of the armature and field circuit are 0.25Ω and 115Ω respectively. If the motor is loaded so as to carry 40A, determine: [4+4]
 - i) iron loss and friction loss
 - ii) Efficiency
4. a) Explain the phenomenon of armature reaction and its effects in three phase synchronous generator for following type of loads: [8]
 - i) Resistive Load
 - ii) Inductive Load
 - iii) Capacitive Load
- b) With the help of phasor diagram, explain the effect of excitation in a 3-phase synchronous motor. [8]

5. a) Derive torque developed by a 3-phase induction motor at running condition. Draw a Torque-slip characteristic and deduce the condition for maximum torque? [5+3]
- b) Write short notes on: (Any Two) [2×4]
- i) Working and application of Stepper motors
 - ii) Resistant start single phase motor
 - iii) Universal motors

TRIBHUVAN UNIVERSITY
INSTITUTE OF ENGINEERING
Examination Control Division
2079 Chaitra

Exam.	Regular		
Level	BE	Full Marks	80
Programme	BEX, BCT, BME, BAM, BIE	Pass Marks	32
Year / Part	II / II	Time	3 hrs.

Subject: - Electrical Machines (EE 554)

- ✓ Candidates are required to give their answers in their own words as far as practicable.
- ✓ Attempt **All** questions.
- ✓ The figures in the margin indicate **Full Marks**.
- ✓ Assume suitable data if necessary.




1. a) Define the term magneto motive force and magnetizing force for magnetic circuit. A ring has mean diameter of 21 cm and a cross sectional area of 10 cm^2 . The ring is made up of semicircular section of cast iron and cast steel, with each joint having a reluctance equal to an air gap of 0.2 mm. Find the ampere turns required to produce a flux of 0.8 m Wb. The relative permeability of cast steel and cast iron are 800 and 166 respectively. [8]
- b) Explain the no load and loaded operation of single phase ideal transformer. Prove that net magnetic flux in the core is remain constant in any loaded condition. [2+2+4]
2. a) A transformer is rated at 100 KVA. At full load its copper loss is 1200 W and its iron loss is 960 W. Calculate: [8]
 - i) The efficiency at full load and 0.8 p.f. lagging.
 - ii) The load KVA at which maximum efficiency occur and the maximum efficiency.
- b) Why dc shunt generator shall not be started at load? Explain the voltage build up process in dc generator. [8]
3. a) A 200 V dc shunt motor has an armature winding resistance of 0.25Ω and field winding resistance of 100Ω . It draws current of 4A and runs with a speed of 1000 rpm at no-load. When the motor is loaded, its speed drops to 960 rpm. Calculate the current drawn by the motor when loaded and speed regulation. [8]
- b) Explain the operation of dc machine as dc motor. Explain electrical and mechanical characteristics of dc shunt motors with proper mathematics. [8]
4. a) Draw the equivalent circuit diagram of three phase induction motor. Explain how the torque is produced in three phase induction motor. [8]
- b) Define regulation in an alternator. A 3 phase, 10 KVA, 400V, 50 HZ star connected alternator with a resistance of 0.5Ω and a synchronous reactance of 10Ω per phase delivers full load rated current at a power factor of 0.8 lagging and at normal rated voltage. Find the power angle and voltage regulation. What will be regulation if power factor of load is 0.8 leading? [8]
5. a) What do you mean by excitation control in synchronous motor? How synchronous motor can work both leading and lagging power factor mode? [8]
- b) Write short notes on: [2×4]
 - i) Double field revolving theory
 - ii) Universal motor

TRIBHUVAN UNIVERSITY
INSTITUTE OF ENGINEERING
Examination Control Division
2078 Chaitra


Exam.	Regular		
Level	BE	Full Marks	80
Programme	BEX, BCT, BME, BAM, BIE	Pass Marks	32
Year / Part	II / II	Time	3 hrs.

Subject: - Electrical Machine (EE554)

- ✓ Candidates are required to give their answers in their own words as far as practicable.
- ✓ Attempt All questions.
- ✓ The figures in the margin indicate Full Marks.
- ✓ Assume suitable data if necessary.



1. a) What are reluctance and permeance in the magnetic circuits? Derive their expressions in any type of magnetic circuits. [8]
- b) For the Magnetic circuit shown below, calculate the Amp-turn (NI) required to establish a flux of 0.75 wb in the central limb. Given that $\mu_r = 4000$ for iron core. [8]

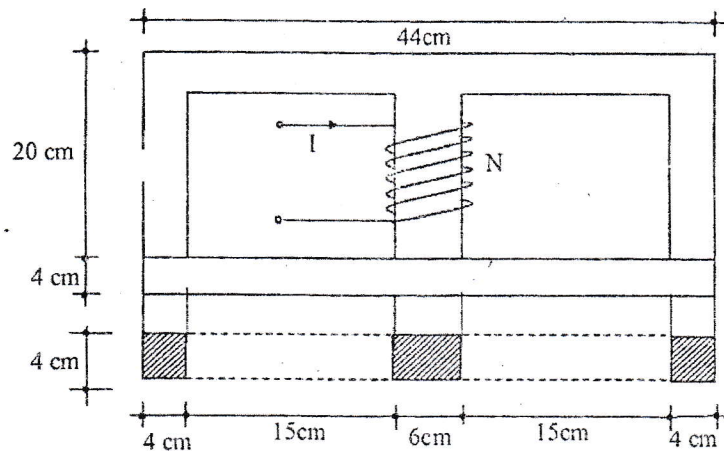

2. a) What is an auto transformer? State its merits and demerits over a two winding transformer. Derive an expression of cu-saving in auto transformer. [2+6]
- b) A 1000- VA 230/115-V transformer has been tested to determine its equivalent circuit. The results of the tests are shown below. [8]

Open – Circuit test (On secondary side)	Short – circuit test (On primary side)
$V_{OC} = 115 \text{ V}$	$V_{SC} = 17.1 \text{ V}$
$I_{OC} = 0.11 \text{ A}$	$I_{SC} = 8.7 \text{ A}$
$P_{OC} = 3.9 \text{ W}$	$P_{SC} = 38.1 \text{ W}$

- (i) Find the equivalent circuit of this transformer referred to the low – voltage side of the transformer.
- (ii) Determine the transformer's efficiency at rated conditions and 0.8 PF lagging.
3. a) A DC compound generator delivers 50A to the load at 500V. The armature, series field and shunt field windings resistance are 0.05Ω , 0.03Ω and 250Ω respectively. The voltage drop in carbon brush is 1 V per brush. Calculate the generated emf i) for long shunt compound ii) for short shunt compound. [8]
- b) Explain the working principle of a d.c motor and derive the equation of torque developed by the armature of the d.c motor. [4+4]

4. a) Define slip. Why does the induction motor operates only in the linear portion of torque-slip characteristics? [4]
- b) A three phase 6 pole, 50 Hz induction motor develops a maximum torque of 30 Nm at 960 rpm. Calculate the torque produced by the motor at 6% slip. The rotor resistance per phase is 0.6Ω . [6]
- c) How does three phase synchronous generator work? What do you mean by armature reaction? Comment the results of different load power factor on armature flux. [6]
5. a) A 1200 kVA, 6600 V, 3-phase star connected stator of a synchronous generator has a armature resistance of 0.4Ω / phase and synchronous reactance of 6Ω / phase. The generator delivers full load current at pf of 0.8 lagging at normal rated voltage. Calculate the terminal voltage for the same excitation and load current at 0.8 pf leading. [8]
- b) Write short notes on: (Any Two) [2×4]
- (i) Capacitor start and run motor
 - (ii) Universal motor
 - (iii) Stepper motor



2078 Poush



TRIBHUVAN UNIVERSITY
INSTITUTE OF ENGINEERING
Examination Control Division
2078 Poush

Exam. Level	Back	Full Marks	80
Programme	BEX, BCT, BME, BAM, BIB	Pass Marks	32
Year/Part	II / II	Time	3 hrs.

Subject: - Electrical Machines (EE 554)

Candidates are required to give their answers in their own words as far as practicable.

Attempt All questions.

The figures in the margin indicate **Full Marks**.

Assume suitable data if necessary.

1. An iron ring of 0.15 meter diameter and 0.001 m^2 in cross section with a saw cut 2 mm wide is wound with 300 turns of wire. The gap flux density is 1 Tesla. The relative permeability of the iron is 800. Determine the exciting current and inductance. [8]

b) How practical transformer is different from ideal one? Explain with phasor diagram the operation of practical transformer when secondary is connected to load. (2+6)
2. a) Explain load characteristics of synchronous generator. Why terminal voltage of a synchronous generator is greater than internal generated emf (E) in case of capacitive load? Explain with the help of armature reaction and phasor diagram. [2+3+3]

b) A 10 kVA, single phase transformer for 2500/500 at no load has $R_1 = 5.50 \Omega$, $X_1 = 12 \Omega$, $R_2 = 0.2 \Omega$, $X_2 = 0.45 \Omega$. Determine the appropriate value of secondary voltage and % voltage regulation at full load, 0.8 pf lagging, when primary applied voltage is 2000 V. Also calculate the power factor for maximum regulation. [6+2]
3. a) Why single phase induction motor is not self-starting? Explain Double Field Revolving theory of single phase motor. [2+6]

b) A 4 pole, 250 V dc long shunt compound generator supplies a load of 10 kW at rated voltage. The armature, series field and shunt field resistances are 0.1Ω , 0.15Ω and 250Ω respectively. The armature is lap wound with 50 slots, each slot containing 6 conductors. If the flux per pole is 50 m Wb, calculate the speed of generator. What would be the speed of same generator if armature is wave wound? [8]
4. a) Define Rotating magnetic field in three phase induction motor and the Torque-Speed (T-N) characteristics of three phase induction motor. [2+6]

b) Explain the importance of back EMF in dc motor. A 240V dc series motor has total resistance of 0.2Ω . When the speed is 1800 rpm, the motor draws a current of 40A. Calculate the value of resistance to be connected in series with the armature so as to limit the speed to 2400 rpm when the line current is 10A. [3+5]
5. a) The power input to a 500 V, 50 Hz, 6-pole, 3-phase induction motor running at 975 rpm is 40 kw. The stator losses are 1 kW and friction loss is 2 kW. Calculate: (a) slip (b) Rotor copper loss (c) output HP (d) efficiency [2+2+2+2]

b) What is hunting in synchronous motor? Explain the loaded operation of three phase synchronous motor. [8]

TRIBHUVAN UNIVERSITY
INSTITUTE OF ENGINEERING
Examination Control Division
2077 Chaitra

Exam.	Regular		
Level	BE	Full Marks	80
Programme	BEX, BCT, BME, BAM, BIE	Pass Marks	32
Year / Part	II / II	Time	3 hrs.

Subject: - Electrical Machines (EE 554)

- ✓ Candidates are required to give their answers in their own words as far as practicable.
- ✓ Attempt All questions.
- ✓ The figures in the margin indicate Full Marks.
- ✓ Assume suitable data if necessary.

1. a) An iron ring of mean length 1.2m and cross sectional area of 0.005 m^2 is wound with a coil of 900 turns. If a current of 2A in the coil produces a flux density of 1.2T in the iron ring, calculate: (i) The mmf (ii) Total Flux in the ring (iii) The magnetic field strength (iv) The relative permeability of iron at this flux density. [8]
- b) Explain the no-load and loaded operation of an ideal transformer. Prove that the flux in the transformer core remains constant irrespective of the change in load. [8]
2. a) Describe different types of losses on the transformer and how the efficiency is calculated? Derive the condition at which the efficiency of transformer will be maximum. [8]
- b) Explain the functions of commutator and carbon brushes in d.c. generator. Explain why dc shunt generator should be started without load. [8]
3. a) Explain voltage build up process in DC shunt generator. Why DC series generator is not started at no load? [8]
- b) A long shunt dc compound generator deliver a current of 80A to the load at 230V. The shunt field, series and armature winding resistances are 100Ω , 0.04Ω and 0.2Ω respectively. Calculate the emf generated by the armature. [8]
4. a) A three-phase delta-connected 440volts, 50 Hz, 4-pole induction motor has a rotor standstill emf per phase of 130 volts. If the motor is running at 1440 rpm, calculate slip, frequency of rotor induced emf, the value of the rotor induced emf per phase and stator to rotor turn ratio for same speed. [8]
- b) With the help of phasor diagrams, explain the effect of excitation in power factor of a three phase synchronous motor. [8]
5. a) Explain Double field revolving theory. How do we make single phase induction motor self starting? [8]
- b) Explain the construction and working of Servo Motor. [8]

TRIBHUVAN UNIVERSITY
INSTITUTE OF ENGINEERING
Examination Control Division
2076 Bhadra

Exam.	Regular		
Level	BE	Full Marks	80
Programme	BEX, BCT, BME, BAM, BIE	Pass Marks	32
Year / Part	II / II	Time	3 hrs.

Subject: - Electrical Machine (EE 554)

- ✓ Candidates are required to give their answers in their own words as far as practicable.
- ✓ Attempt All questions.
- ✓ The figures in the margin indicate Full Marks.
- ✓ Assume suitable data if necessary.


1. a) A ring of iron has a mean diameter of 15 cm, a cross section of 1.5 cm^2 and has a radial air gap of 0.5 mm cut in it. It is uniformly wound with 1500 turns of insulated wire and a current of 1.2A produces a flux of 0.1mWb across the air gap. Calculate the relative permeability of iron on the assumption that there is no magnetic leakage. [8]
- b) Explain the working principle of a single transformer with necessary diagram and deduce the expression for emf in secondary winding. [8]
2. a) DC series motor should not be started without load. Justify the statement. [5]
- b) A 250 KVA, 50Hz, 11000/400V, 1-phase transformer has primary and secondary winding resistances of 0.3Ω and 0.001Ω respectively. Calculate the efficiency of transformer at full load at 0.8 p.f. lagging. Given that iron loss is 2000w. [6]
- c) How three phase induction motor can be used as induction generator? [5]
3. a) A long-shunt dc compound generator delivers a load current of 50 A at 500 V, and the resistances of armature, series field and shut field are 0.05Ω , 0.03Ω and 250Ω respectively. Calculate the generated emf and the armature current. Allow 1 V per brush for contact drop. [8]
- b) A 200 V DC series motor runs at 1000 rpm and takes 20 A. Combined resistance of armature and field is 0.4Ω . Calculate the resistance to be inserted in series so as to reduce the speed to 800 rpm keeping load torque constant. [8]
4. a) Explain the T-S characteristic of 3-phase induction motor. Explain the effect of rotor resistance on T-S characteristic. [8]
- b) A 4 pole, 50Hz 3-phase induction motor develops a maximum torque of 50 N-m at 1350 rpm. The rotor circuit resistance is 0.5Ω per phase. Calculate the torque developed by the motor at speed of 1450 rpm. [8]
5. a) Why a three-phase synchronous motor is called doubly excited machine. Explain its V-curve and inverted V-curve of 3 phase synchronous motor. [8]
- b) Prove that a single-phase induction motor winding when excited by a single phase-phase supply produces two equal and opposite revolving fields. [8]

Exam.	Back	
Level	BE	Full Marks 80
Programme	BEX, BCT, BME, BIE, BAM	Pass Marks 32
Year / Part	II / II	Time 3 hrs.

Subject: - Electrical Machine (EE554)

- ✓ Candidates are required to give their answers in their own words as far as practicable.
- ✓ Attempt All questions.
- ✓ The figures in the margin indicate Full Marks.
- ✓ Assume suitable data if necessary.

1. a) Explain the losses, which occur when magnetic materials are subjected to an alternating flux. How can we reduce these losses practically? [5+3]
- b) What do you mean by armature reaction in a synchronous generator? How the resistive inductive, and capacitive load affects the nature of armature reaction. [8]
2. a) Explain, how can we make equivalent circuits referred to primary side and referred to secondary side. What happens, when a power transformer is connected to a d.c. supply of the same voltage ratings? [6+2]
- b) A 10 KVA, 200/400 V, 50 Hz single-phase transformer gave the following test results:
 - O.C. test : 200V, 1.3A, 120W, on L.V. side.
 - S.C. test : 22V, 30 A, 200 W, on H.V. side.
 - Calculate: I_μ , I_w , R_o , X_o , R_{o2} , X_{o2} and Z_{o2} . [8]
3. a) Explain the functions of commutator and carbon brushes in d.c generator with neat sketch. [8]
- b) A 230V, shunt motor takes 5A at no load. The resistance of the armature and field circuit are 0.25Ω and 115Ω respectively. If the motor is loaded so as to carry 40 A, determine (i) Iron and friction losses (ii) efficiency [8]
4. a) Explain the operating principle of three phase induction motor with neat sketches. Why rotor speed is always less than synchronous speed. Justify. [6+2]
- b) An alternator on open circuit generates 360V at 60 Hz, when the field current is 3.6 A. Neglecting saturation, determine the open circuit emf. When the frequency is 40 Hz and the field current is 2.4 A. [8]
5. a) Explain the operating principle and characteristics of split phase induction motor with neat sketches. [8]
- b) Explain construction, operation and characteristics of universal motor. Why is it called so? Give reason. [8]




Exam.	Regular		
Level	BE	Full Marks	80
Programme	BCT/ BEX	Pass Marks	32
Year / Part	II / II	Time	3 hrs.

Subject: - Discrete Structure (CT551)

- ✓ Candidates are required to give their answers in their own words as far as practicable.
- ✓ Attempt All questions.
- ✓ The figures in the margin indicate Full Marks.
- ✓ Assume suitable data if necessary.


1. Define the terms Tautology, Contradiction and Logical Equivalences. Show that $\neg A \rightarrow \neg B$ and $B \rightarrow A$ are Logically Equivalent. State the converse, contrapositive and inverse of the statement, "A positive integer is prime only if it has no divisors other than 1 and itself". [3+2+3]
2. Show that the premises "There is someone in this class who has been to Pokhara. Everyone who goes to Pokhara visit the Sarankot. Therefore, someone in this class has visited the Sarankot." [8]
3. Use mathematical induction to verify: [8]

$$1^2 - 2^2 + 3^2 - 4^2 + \dots + (-1)^{(n+1)} n^2 = (-1)^{n+1} n(n+1)/2$$
4. a) State the closure properties of Regular Language. [3]
 b) Let L be the set of strings accepted by the FSA shown below. Now construct a FSA that accepts the strings $L^R = \{X_n \dots X_1 | X_1 \dots X_n \in L\}$ [5]

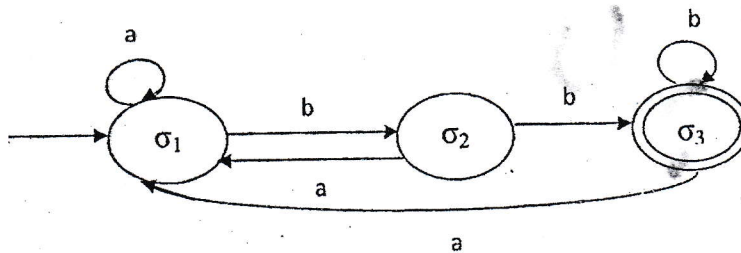

5. i) Find the language $L(G)$ over $\{a,b,c\}$ generated by the grammar G with production: $S \rightarrow aSb, aS \rightarrow Aa, Aab \rightarrow c$. [4+4]
 ii) Write a grammar that generates the string over $\{a,b\}$ not ending with ab.
6. Find the solution of recurrence relation of $a_n = 5a_{n-1} - 6a_{n-2} + 3n + 2^n$ with initial condition $a_0 = 0, a_1 = 1$, and $a_2 = 2$. [8]
7. Prove the theorem, "An undirected graph has an even number of vertices of odd degree." Describe complete graph and bipartite graph. [3+5]
8. What is chromatic number of $K_5, K_{m,n}$ and C_p for $P \geq 3$, explain with suitable figure. How Euler graph is different from Hamilton graph, explain? [5+3]

9. Use Dijkstra's algorithm to find the length of a shortest path from the vertices A to other in the graph below. [8]

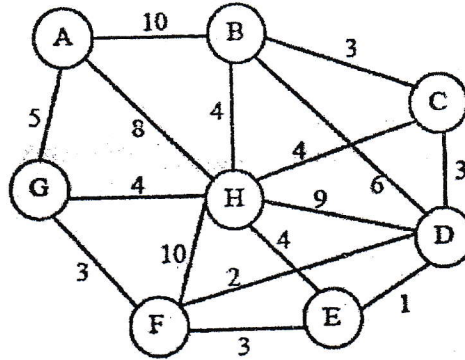

10. Write short notes on:

- i) Max Flow and Min cut Theroem
- ii) Plannar Graph

[4+4]

Exam.	Regular	
Level	BE	Full Marks 80
Programme	BEX, BCT, BME, BIE, BAM	Pass Marks 32
Year / Part	II / II	Time 3 hrs.

Subject: - Electrical Machine (EE554)

- ✓ Candidates are required to give their answers in their own words as far as practicable.
- ✓ Attempt All questions.
- ✓ The figures in the margin indicate Full Marks.
- ✓ Assume suitable data if necessary.

1. a) A steel ring of 12 cm mean radius and of circular cross-section 1 cm in radius has an air gap of 2 mm length. It is wound uniformly with 550 turns of wire carrying 3A of current. The air gap takes 60% of total magnetomotive force. Find the total reluctance. [5]
- b) Explain hysteresis and eddy current losses in electrical machines. Prove that hysteresis loss in a magnetic material is equal to the area of hysteresis loop. [5]
- c) Explain the following: [2×3]
 - (i) Faraday's laws of electromagnetic induction
 - (ii) Fleming's right and left hand rules
2. a) Derive expression giving amount of copper saving in an auto-transformer. [4]
- b) Discuss how to conduct open-circuit and short-circuit tests on a single phase transformer. From the test results how the efficiency and voltage regulation of the transformer is determined? [6]
- c) An ideal 3-phase delta/star step-down transformer delivers power to a balanced 3-phase load of 120 kVA at 0.8 power factor. The input line voltage is 11 kV and the turns ratio of the transformer, phase to phase is 10. Determine the line voltage, line currents, phase voltages and phase currents on both the primary and secondary sides. [6]
3. a) In a 220 V compound generator, the armature, series and shunt windings have resistances of 0.3Ω , 0.2Ω and 60Ω respectively. The load consists of 80 lamps, each rated at 60 W and 220 V. find the total emf and armature current when the machine is connected for i) long shunt and ii) short shunt. [6]
- b) What do you mean by back emf in DC motors? Explain the significance of back emf. [4]
- c) Explain the speed-current, torque-current and speed-torque characteristics of a DC shunt motor. [6]
4. a) Explain the torque-slip characteristics of a three phase induction motor. Starting with the expression for torque as a function of slip, show that the value of maximum torque is independent of rotor resistance. [6]
- b) The power input to the rotor of a 440 V, 50 Hz, 3-phase, 6-pole, induction motor is 50 kW. The rotor emf makes 120 cycles per minute. Friction and windage losses are 2 kW. Calculate (i) slip (ii) rotor speed (iii) rotor copper losses (iv) mechanical power developed (v) output power (vi) output torque [6]
5. a) Explain about constructional details and working principle of three phase synchronous generator. [8]
- b) Describe briefly the effect of varying excitation upon the armature current and power factor of a 3-phase synchronous motor when input power to the motor is maintained constant. [6]
- c) Using double revolving field theory, explain the working of a single phase induction motor. [6]


Exam.	Regular		
Level	BE	Full Marks	80
Programme	BEX, BCT, BME, BIE	Pass Marks	32
Year / Part	II / II	Time	3 hrs.

Subject: - Electrical Machine (EE551)

- ✓ Candidates are required to give their answers in their own words as far as practicable.
- ✓ Attempt All questions.
- ✓ The figures in the margin indicate Full Marks.
- ✓ Assume suitable data if necessary.

1. a) For magnetic circuit shown in figure below, find out the current to be passed through coil B so that magnetic flux in CD section is 2 mWb. Given $\mu_r = 1000$

[8]

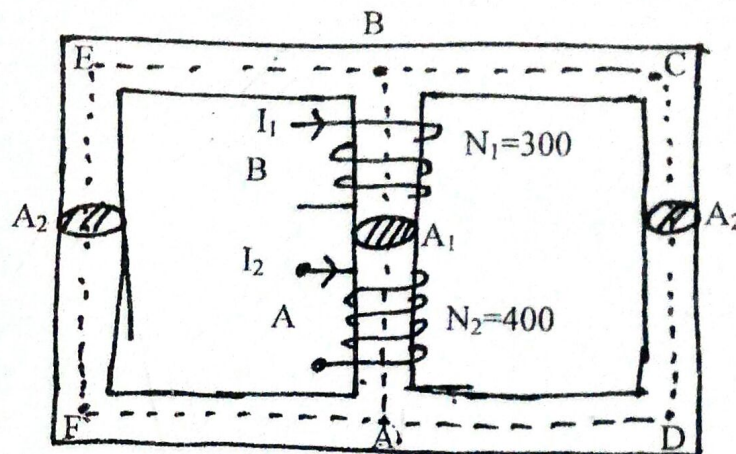

Given:

$$I_2 = 3 \text{ Amp}, A_1 = 6 \text{ cm}^2, A_2 = 3 \text{ cm}^2$$

$$AB = CD = EF = 20 \text{ cm}$$

$$BC = AD = BE = AF = 20 \text{ cm}$$

- b) Copper loss is assumed to be negligible in no load test and iron loss is assumed negligible in short circuit test. Explain why it is so.
2. a) The following test result were obtained on 20 KVA, 2200/220 V, 50 HZ single phase transformer

[8]

Open circuit test: 220 V, 1.1 A, 125 W

Short circuit test: 52.7 V, 8.4 A, 287 W

[8]

- i) Calculate the equivalent circuit parameters referred primary sides and draw the equivalent circuits
 - ii) Calculate maximum efficiency at full load
 - iii) Calculate the efficiency at half full load with 0.8 power factor lagging
- b) How current transformer is different from conventional transformer. Explain how CT is used to measure high currents. Also explain, what happens if the secondary of CT is open when there is high current flowing in primary side.

[8]

3. a) Using circuit diagram and graphical representation, explain the characteristics of DC series generator and DC shunt generator. Also mention their applications. [8]
- b) A 220 V, DC series motor draws 100 A current and runs at 1200 RPM. What is value of armature resistance required to run the motor at 800 RMP keeping load torque constant. Given armature resistance = 0.2 ohm, field winding = 0.05 ohm [4+4]
4. a) Explain the torque-slip characteristics of an induction motor. Show the condition for which the maximum torque develops in the induction motor. [5+3]
- b) A 6-pole, 50 Hz, three-phase induction motor has rotor resistance of $0.4 \Omega/\text{phase}$, maximum torque is 200 Nm at 850 rpm. Find (i) torque at 4% slip, and (ii) additional rotor resistance to get $(2/3)^{\text{rd}}$ of maximum torque at starting. [8]
5. a) Explain effect of excitation on pf of synchronous motor with necessary diagrams. [8]
- b) Explain double field revolving theory refer to single phase induction motor and prove that a single phase induction motor is not self starting. [8]

Exam.	New Back (2066 & Later Batch)		
Level	BE	Full Marks	80
Programme	BEX, BCT, BME, BIE	Pass Marks	32
Year / Part	II / II	Time	3 hrs.

Subject: - Electrical Machine (EE551)

- ✓ Candidates are required to give their answers in their own words as far as practicable.
- ✓ Attempt All questions.
- ✓ The figures in the margin indicate Full Marks.
- ✓ Assume suitable data if necessary.

1. a) Define coercitivity and retaintivity with the help of BH curve. [6]
- b) A magnetic circuit consists of a circular iron core having mean length of 10 cm and cross sectional area of 100 square mm. The air gap is 2 mm and the core has 600 turns of winding. Calculate the magnitude of current to be passed through the winding to produce air gap flux of 1 tesla (permeability of iron = 4000) [10]
2. a) Explain working principle of an auto-transformer. Derive an expression for Cu saving in an auto-transformer. [8]
- b) A 4-kVA, 200/400V single phase transformer has following test results: [8]

O.C Test: 200V	0.8A	70W
S.C Test: 20V	10A	60W

Obtain equivalent circuit parameters of the transformer refer to L.V side.
3. a) Make a detail comparison of dc shunt generator and dc series generator with their diagrams, equations and characteristics curve. [8]
- b) A dc shunt motor is supplied by a source of 200 V. It draws a current of 20 A and runs at speed of 1500 rpm. The armature and field winding resistance are 0.08 Ω and 110 Ω respectively. A resistance of 0.02 Ω is added in series with armature and load torque is increased by 30%, calculate new speed. [8]
4. a) How does induction motor and synchronous motor adjust the current according to the change in load? Explain briefly using mathematical expression. [4+4]
- b) A 4 pole, 50 Hz, 3-phase slip ring induction motor has star connected stator and rotor windings. The rotor winding has impedance of $(1+j4)\Omega$ per phase at stand still. The stator to rotor turn ratio is 2. Given that emf induced in rotor circuit is 400 V between two slip rings at stand still. Calculate starting current and running current at 1400 rpm. [8]
5. a) A 1200 KVA, 6000 V, 3 phase star connected stator of a synchronous generator has a armature resistance of 0.4 ohms/phase and synchronous reactance of 6 ohm/phase. The generator delivers full load current at pf 0.8 lagging at normal rated voltage. Calculate the terminal voltage for the same excitation and load current at 0.8 pf leading. [8]
- b) Why single phase induction motors are not self-starting? Explain any two starting methods for single phase induction motor. [8]

Exam. Level	Regular	
	BE	Full Marks
Programme	BEX, BCT, BME, BIE	Pass Marks
		32
Year / Part	II / II	Time
		3 hrs.

Subject: - Electrical Machine (EE554)

- ✓ Candidates are required to give their answers in their own words as far as practicable.
- ✓ Attempt All questions.
- ✓ All questions carry equal marks.
- ✓ Assume suitable data if necessary.

1. a) Explain the operating principle of an ideal transformer and derive the emf equation.
b) A ring of 30 cm mean diameter is made up of round iron rod 2.5 cm in diameter. A saw cut of 1 mm is made on the ring. It is uniformly wound with 500 turns of wire. Calculate the current required by the exciting coil to produce a total flux of 4m Wb. Assume a relative permeability of iron at this flux density as 800.
2. a) Explain the operation principle of dc generator. What are main functions of carbon brush in dc generator?
b) A 20 kVA, 250V/2500V, 50Hz single phase transformer gave the following test results:
No-load test (on L.V. side): 250V, 1.4A, 105 watts
Short circuit test (on H.V.side): 120V, 8 A, 320 watts
Calculate the equivalent circuit parameters referred to primary side and draw the equivalent circuit.
3. a) Sketch and explain the torque slip characteristics of a 3-phase induction motor indicating the starting torque, maximum torque and the operating region. How does rotor resistance affect the torque slip characteristics?
b) A 200V DC shunt motor drives a centrifugal pump where constant torque is required. The motor draws a current of 50 A when running at 1000rpm. What value of resistance must be inserted in the armature circuit to reduce the speed to 800rpm at constant torque? Given that armature winding resistance, $R_a = 0.1 \Omega$ and field winding resistance, $R_f = 100 \Omega$
4. a) With the help of phasor diagrams, explain the effect of excitation in a 3-phase synchronous motor.
b) A 4-pole, 50 Hz, 3 phase induction motor develops a starting torque of 50 N-m. The rotor winding has an impedance of $(0.8+j2) \Omega$ per phase at stand still. At what speed the motor will develop maximum torque and calculate magnitude of the maximum torque.
5. a) What do you understand by double field revolving theory? Explain it with the help of a neat diagram.
b) A 500 KVA, 50 Hz, 6600V/400V, 1- phase transformer have primary and secondary winding resistances are 0.4Ω and 0.001Ω respectively. If the iron loss is 3.0 KW, Calculate the efficiency at (a) full load (b) half full load.

Examination Control Division

2072 Magh

Exam.	New Back (2066 & Later Batch)		
Level	BE	Full Marks	80
Programme	BEX, BCT, BME, BIE	Pass Marks	32
Year / Part	II / II	Time	3 hrs.

19

Subject: - Electrical Machine (EE554)

- ✓ Candidates are required to give their answers in their own words as far as practicable.
- ✓ Attempt All questions.
- ✓ All questions carry equal marks.
- ✓ Assume suitable data if necessary.

1. a) An iron ring has a mean length of 2m and cross-sectional area of 0.01 m^2 . It has a radial air gap of 4 mm. The ring is wound with 250 turns. What dc current would be needed in the coil to produce a flux of 0.8 Weber in the air gap? Assume that $\mu_r = 400$.
- b) Explain the operation of transformer with no-load and load. Prove that the magnetic field in a transformer core remains constant at any load.
2. a) A 20 kVA, 250/2500V, 50 Hz, single phase transformer has $R_o = 595.2 \Omega$, $X_o = 187.26 \Omega$, $R_{01} = 0.05 \Omega$ and $X_{01} = 0.14 \Omega$. Calculate (i) iron loss of the transformer (ii) efficiency of the transformer at half load with 0.8 pf lagging.
- b) A short shunt compound generator delivers a load current of 30 A at 220 V and has armature, series and shunt field resistances of 0.05Ω , 0.03Ω and 200Ω respectively. Calculate the induced emf and the armature current. Allow 1 V per brush contact drop.
3. a) A 200 V DC series motor draws full-load line current of 38 A at the rated speed of 600 rpm. The motor has armature resistance of 0.4Ω and the series field resistance is 0.2Ω find:
 - i) The speed of the motor when the load current drops to 19 A
 - ii) The speed on removal of load when the motor takes only 1 A from supply
- b) Explain torque-slip characteristics of 3 phase induction. Deduce the condition for which maximum torque. Discuss the effect of variation of rotor resistance on this maximum torque.
4. a) Explain why a 3 phase synchronous motor is not self starting. Explain a method of starting a 3 phase synchronous motor.
- b) Draw equivalent circuit of 3 phase induction motor at stand still and running conditions. Derive the expression for starting torque and running torque.
5. a) Explain the operating principle of servo motor.
- b) The no-load test and short circuit test on a 220V/2200 volt single phase transformer gave following results.

No load test (on L.V side):	220V	1.2 Amp	100 watts
Short circuit test (on HV side):	110V	8Amp	300 watts

 Calculate equivalent circuit parameters refer to primary side and draw the equivalent circuit.

Exam.	Regular		
Level	BE	Full Marks	80
Programme	BEX, BCT, BME, BIE	Pass Marks	32
Year / Part	II / II	Time	3 hrs.

Subject: - Electrical Machine (EE554)

- ✓ Candidates are required to give their answers in their own words as far as practicable.
- ✓ Attempt All questions.
- ✓ The figures in the margin indicate Full Marks.
- ✓ Assume suitable data if necessary.

1. a) What are different types of losses in transformer? Derive the expression of efficiency of transformer. [8]
- b) An iron ring of mean diameter 100cm and cross sectional area 10cm^2 is wound with 1000 turns and has $\mu_r = 2000$. Compute (i) reluctance (ii) flux produced when the current through the coil is 1A (iii) Flux in the ring if a saw cut of 1mm length is made, the current through the coil remaining the same. [8]
2. a) A 25 KVA, single phase, 11 KV / 400V transformer has impedance of primary and secondary $0.4 + j2\Omega$ and $0.02 + j1\Omega$ respectively. Determine the load terminal voltage and primary current at half load. [8]
- b) Describe the construction and working principle of a dc generator with neat diagram. Also derive the emf equation of a dc generator. [8]
3. a) Describe different methods of controlling the speed of shunt DC motor. [8]
- b) Explain with necessary vector diagram how rotating magnetic field is produced in a three phase induction motor. Also explain how this rotating magnetic field helps the motor to rotate. [8]
4. a) Explain torque slip characteristics of 3-phase induction motor. Why the induction motor operates only in linear portion of torque-slip characteristics. [8]
- b) A 3.3 KV, 3-phase star connected synchronous motor has impedance of $0.2 + j2.2\Omega/\text{phase}$ of the armature winding. The motor is operated at 0.5 pf leading with line current of 100 A. Determine the back emf per phase and also draw phasor diagram. [8]
5. Give reasons for the following statements. [4x4]
- a) Single phase induction motors are not self starting
- b) Servo motor has longer length and smaller diameter compared to other normal motor
- c) DC series motor can also be operated from ac supply
- d) Hysteresis and eddy current losses depends on the frequency of supply system

20

2071 Magh

Exam.	New Back (2066/31/2071 - Banch)		
Level	BE	Full Marks	80
Programme	BEX, BCT, BME, BIE	Pass Marks	32
Year / Part	II / II	Time	3 hrs.

Subject: - Electrical Machine (EE554)

- ✓ Candidates are required to give their answers in their own words as far as practicable.
- ✓ Attempt All questions.
- ✓ The figures in the margin indicate Full Marks.
- ✓ Assume suitable data if necessary.

1. a) A rectangular iron core is shown in figure 1. It has a mean length of magnetic path of 100 cm, cross-section of (2 cm. \times 2 cm), relative permeability of 1400 and an air-gap of 5 mm cut in the core. The three coils carried by the core have number of turns, $N_a = 335$, $N_b = 600$ and $N_c = 600$; and the respective currents are 1.6 A, 4 A and 3 A. The directions of the currents are as shown in the figure. Find the flux in the air-gap. [6]

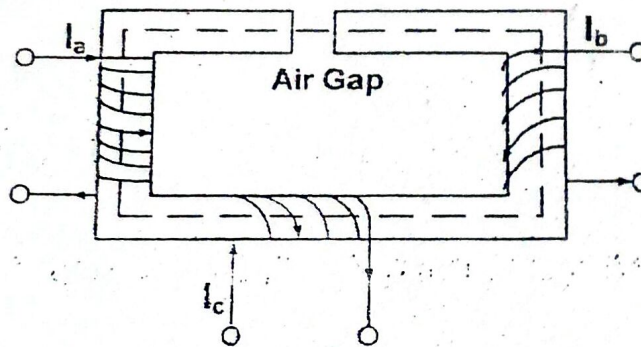


Figure 1

- b) State Faraday's Laws of electromagnetic induction. Distinguish between statically induced emf and dynamically induced emf. [6]
2. a) Explain the working of an ideal transformer under (i) no-load and (ii) loaded conditions and derive expressions for voltage and current ratios relating to transformer turns ratio. [4+4]
- b) The following test results were obtained for open circuit and short circuit tests on a 8 kVA, 400/120 V, 50 Hz transformer: [8]
- Open-circuit Test (LV Side) : 120 V, 4 A, 75 W
 Short-circuit Test (HV Side) : 9.5 V, 20 A, 110 W
- Calculate the equivalent circuit parameters referred to high voltage side. Also calculate the efficiency at half full load and 0.8 power factor lagging load.
3. a) Explain the working principle of dc generator with neat diagram. [3+3]
- b) A short shunt compound generator supplies a load current of 100 A at 250 V. The generator has the following winding resistances: shunt field 130 Ω , armature 0.1 Ω and the series field 0.1 Ω . Find the emf generated and the armature current, if the brush drop is 1 V per brush. [6]

4. a) What is back emf? How does back emf play an important role in DC motor? [2+4]
b) A dc shunt motor runs at 600 RPM taking 60 A from a 230 V supply. Armature resistance is 0.2Ω and field resistance is 115Ω . Find the speed when the current through the armature is 30 A. [6]
5. a) Explain the torque-slip characteristics of an induction motor. Show the condition for which the maximum torque develops in the induction motor. [3+3]
b) A 3-phase delta connected 440 volts, 50 Hz, 4-pole induction motor has a rotor stand-still emf per phase of 130 volts. If the motor is running at 1,440 RPM, calculate for this speed : (i) the slip, (ii) the frequency of rotor induced emf, (iii) the value of the rotor induced emf per phase, and (iv) stator to rotor turn ratio. [4]
6. a) What do you mean by V-curve and inverted V-curve for a synchronous motor? Explain with a neat diagram. [6]
b) What are the advantages of rotating magnetic system and stationary armature system in ac machine? [4]
c) Write short notes on the following: [2×4]
i) Universal motor
ii) AC servo motor

Exam.	Regular		
Level	BE	Full Marks	80
Programme	BEX, BCT, BME, BIE	Pass Marks	32
Year / Part	II / II	Time	3 hrs.

Subject: - Electrical Machine (EE554)

- ✓ Candidates are required to give their answers in their own words as far as practicable.
- ✓ Attempt All questions.
- ✓ The figures in the margin indicate Full Marks.
- ✓ Assume suitable data if necessary.

1. a) The flux in transformer remains practically constant from no load to full load. Justify the statement. [4]
- b) Derive an expression for Cu saving in an auto-transformer. [4]
- c) A 230 V / 2300 V single-phase transformer is excited by 230 V ac voltage. The equivalent resistance and reactance referred to primary side are 0.1Ω and 0.4Ω respectively. Given that $R_0 = 500 \Omega$ and $X_0 = 200 \Omega$. The load impedance is $(400 + j600) \Omega$. Calculate: (i) Primary current and input power factor (ii) Secondary terminal voltage. [8]
2. a) Derive an emf equation for a dc generator. [4]
- b) DC shunt generator shall be started keeping its output terminal open. Justify the statement. [4]
- c) A 4 pole, 250 V long shunt dc compound generator supplies a load of 10 KW at the rated voltage. The armature, series and shunt field resistances are 0.1Ω , 0.15Ω and 250Ω respectively. The armature is lap wound with 300 conductors. If the flux per pole is 50 mWb, calculate the speed of the generator. [8]
3. a) With the help of a neat sketch, explain the working principle of three terminal DC motor starter. [5]
- b) A dc series motor of resistance 1Ω between terminals runs at 1,000 RPM at 250 V with a current of 20 A. Find the speed at which it will run when connected in series with a 6Ω resistance and taking the same current at the same supply voltage. [5]
- c) A circular iron core has a cross-sectional area of 5 sq.cm. and mean length of 25 cm including an air gap of 4 mm. The core is wound with 500 turns of winding. Calculate the inductance of the coil. If a dc current of 10 Ampere passed through the coil, calculate magnetic flux in the core. Given that relative permeability of the core is 2000. [6]
4. a) What will be the condition for maximum torque and explain torque slip characteristics of 3-phase induction motor. [8]
- b) A 3-phase, 50 Hz induction motor has starting torque which is 1.25 times full load torque and a maximum torque which is 2.5 times the full load torque. Neglecting stator resistance and rotational losses and assuming constant rotor resistance. Find [8]
 - i) slip at maximum torque
 - ii) the slip at full load
 - iii) the current at starting in per unit full load current
5. a) With the help of phasor diagrams, explain the effect of excitation in a 3-phase synchronous motor. [8]
- b) A 1200 KVA, 6600 V, 3-phase star connected stator of a synchronous generator has a armature resistance of $0.4 \Omega/\text{phase}$ and synchronous reactance of $6 \Omega/\text{phase}$. The generator delivers full load current at pf of 0.8 lagging at normal rated voltage. Calculate the terminal voltage for the same excitation and load current at 0.8 pf leading. [8]

INSTITUTE OF ENGINEERING
Examination Control Division

2070 Magh

Level	BE	Full Marks	80
Programme	BEX, BCT, BME, BIE	Pass Marks	32
Year / Part	II / II	Time	3 hrs.

Subject: - Electrical Machine (EE554)

- ✓ Candidates are required to give their answers in their own words as far as practicable.
- ✓ Attempt All questions.
- ✓ The figures in the margin indicate Full Marks.
- ✓ Assume suitable data if necessary.

1. a) Explain the working of an ideal transformer under (i) no-load and (ii) loaded conditions and derive expressions for voltage and current ratios relating to transformer ratio. [8]

b) The following test results were obtained on a 20 kVA, 2200/220 V, 50 Hz single phase transformer: [8]

Open-circuit Test (LV Side): 220 V, 1.1 A, 125 W

Short-circuit Test (HV Side): 52.7 V, 8.4 A, 287 W

Calculate the equivalent circuit referred to L.V side and draw the equivalent circuit.

2. a) Explain torque-armature current and speed-torque characteristics of DC shunt and DC series motor. [8]

b) A 220V dc shunt motor draws a current of 40A at full load and runs with speed of 1400rpm. Calculate the value of resistance required to be inserted in the armature circuit so that speed drops to 1200rpm at constant load. Given that $R_a = 0.02 \text{ ohm}$ and $R_f = 100 \text{ ohms}$. [8]

3. a) Explain why synchronous motor is not self starting? Explain the starting method using damper winding. [8]

b) A 4-pole dc shunt generator has wave wound armature. The armature and field winding resistance are 0.2 ohm and 60 ohms respectively. The brush contact drop is 1V per brush. The generator is delivering a power of 3 kW at 120V. Calculate: [8]

- i) Total armature current coming out from the brush
- ii) Current in each armature conductor
- iii) Generated EMF (E)

4. a) Explain the torque-slip characteristics of 3 phase induction motor. Show the condition for which the maximum torque develops in the induction motor. Discuss the effect of variation of rotor resistance on this maximum torque. [8]

b) A 8-pole, 50 Hz, 3 phase induction motor develops a starting torque of 50 N-. The rotor winding has an impedance of $(0.8 + j2) \Omega$ per phase. At what speed the motor will develop maximum torque and calculate the magnitude of maximum torque. [8]

5. a) What do you understand by double field revolving theory? Explain it with the help of a neat diagram. [8]

b) A ring of 30 cm mean diameter is made up of round iron rod 2.5 cm in diameter. At one end, a saw cut of 1 mm wide is made through it. It is uniformly wound with 500 turns of wire. Calculate the current required by the exciting coil to produce a total flux of 4 mWb. Take relative permeability of iron as 800. Neglect leakage and fringing. [8]

Regular (2066 & Later Batch)			
Exam.	BE	Full Marks	80
Level	BEX, BCT, BME, BIE	Pass Marks	32
Programme	II / II	Time	3 hrs.
Year / Part			

Subject: - Electrical Machine (EE554)

- ✓ Candidates are required to give their answers in their own words as far as practicable.
- ✓ Attempt All questions.
- ✓ All questions carry equal marks.
- ✓ Assume suitable data if necessary.

1. a) Explain the no-load and loaded operation of an Ideal transformer. Prove that the net magnetic flux in the core remains constant at any load.
- b) A magnetic circuit consists of a circular iron core having mean length of 10cm and cross-sectional area of 100mm^2 . The air gap is 2mm and the core has 600 turns of winding. Calculate the magnitude of current to be passed through the winding to produce air gap flux of 1 Telsa. Given $\mu_r = 4000$.

2. a) Explain the working principle of a d.c. motor and derive the equation of Torque developed by the armature of the d.c. motor.

- b) A dc series motor with armature resistance of 0.06Ω , and field winding resistance of 0.04Ω is supplied by a 220V source. If the motor draws 25A when running at 1200rpm, calculate the current drawn by motor when running at 800 rpm.

3. a) Explain the Armature control method and field control method of speed control of DC shunt motor.

- b) A 4 pole dc shunt generator has armature and field winding resistance are of 0.2Ω and 60Ω respectively. The brush contact drop is 1V per brush. The generator is delivering a power of 3KW at 120V. Calculate:

- i) Total armature current coming out from the brush
- ii) Current in each armature conductor
- iii) Generated EMF(E)

4. a) Explain the armature reaction in a synchronous generator for resistive, inductive and capacitive loading with necessary diagram.

- b) A-3phase, slip-ring, induction motor with star-connected rotor has an induced e.m.f. of 120 volts between slip-rings at standstill with normal voltage applied to the stator. The rotor winding has resistance per phase of 0.3 Ohm and standstill leakage reactance per phase of 1.5 Ohm. Calculate the current/phase when running short-circuited with 4% slip.

5. a) Explain the nature magnetic field created by signal phase induction motor with the help of double field revolving theory and explain why single phase induction motor is self starting.

- b) Write about the working principle of a signal stack stepper motor with neat diagram.

Exam.	New Back (2066 & Later Batch)	
Level	BE	Full Marks 80
Programme	BEX, BCT, BME, BIE	Pass Marks 32
Year / Part	II / II	Time 3 hrs

Subject: - Electrical Machine (EE554)

- ✓ Candidates are required to give their answers in their own words as far as practicable.
- ✓ Attempt All questions.
- ✓ All questions carry equal marks.
- ✓ Assume suitable data if necessary.

1. a) Define retentivity and coercivity of core using hysteresis loop of a magnetic material used in electrical machine. Prove that energy spent per cycle per unit volume is proportional to the area of loop.
b) An iron ring has a mean length of 2.5 m and $A = 0.04 \text{ m}^2$. It has a radial air gap of 5 mm. the ring is wound with 200 turn, what dc current would be needed in the coil to produce a flux of 0.82 Wb in the air gap. Assume that $\mu_r = 5000$.
2. a) What are different types of losses in DC generator? Derive the expression for the efficiency of DC generator.
b) A 220 v, DC series motor draws 100 A current and runs at 1200 rpm. What is the value of armature resistance required to run the motor at 800 rpm. Given: Armature resistance = 0.2Ω , field winding resistance = 0.05Ω .
3. a) A dc shunt motor draws a current of 120 A from 480 V dc source, the armature winding and field winding resistance are 0.5Ω and 22Ω respectively. The motor has 6 poles and the armature winding has 740 conductors. The flux per pole is 0.08 Wb. Calculate: (i) Armature current (ii) Speed (iii) Torque developed by armature.
b) What is back emf in dc motor? How back emf helps to developed required torque according load applied on the shaft.
4. a) Show that the synchronous motor can be operated in both leading as well as lagging pf mode.
b) A 6 pole, 50 Hz, 3-ph, slip ring induction motor has star connected stator and rotor windings. The rotor windings has impedance of $0.8 + j4 \Omega$ / phase at standstill. The induced emf between slip rings at standstill is 400 V. The stator to rotor turn ratio is 4. The motor runs at 960 rpm at no load. Calculate current drawn by motor at standstill and no load.
5. a) Explain double revolving field theory. Explain any two methods which are used for starting single phase induction motor.
b) Explain the operating principle of dc servo motor and its applications.

33 TRIBHUVAN UNIVERSITY
INSTITUTE OF ENGINEERING
Examination Control Division

2068 Bhadra

Exam.	BE	Regular	
Level	BE	Full Marks	80
Programme	BEX, BCT, BME, BIE	Pass Marks	32
Year / Part	II / II	Time	3 hrs.

Subject: - Electrical Machine

- ✓ Candidates are required to give their answers in their own words as far as practicable.
- ✓ Attempt any Five questions.
- ✓ The figures in the margin indicate Full Marks.
- ✓ Assume suitable data if necessary.

1. State whether the following statements are true or false and justify them. [(1+3)×4]

- a) Secondary of CT should not be kept open while the primary winding is energized. T
- b) DC series motor should always be started at no load. F
- c) Rotor core loss is often neglected in 3 phase induction motor.
- d) Construction of auxiliary winding of 1 phase induction motor is different from that of the main winding. F

2. a) Describe different types of losses on the transformer. Also derive the expression for the maximum efficiency of the transformer. [8]

b) A 10 kVA, 200/400V, 50HZ, 1-phase, transformer gave the following test results: [8]

OC test (HV open): 200V 1.3A 120W

SC test (LV, short): 22V 30A 200W

Determine shunt and series branch parameters referred to Low Voltage Side and hence draw equivalent circuit diagram also. [8]

3. a) Explain working principle of DC generator in detail and hence derive the expression of emf equation also. [8]

b) A 200V, dc shunt motor drives a centrifugal pump where torque is proportional to the square of speed. The motor draw a current of 50A when running at 1000 rpm. What value of resistance must be inserted in the armature circuit to reduce the speed to 800 rpm. Given: Armature resistance (R_a) = 0.1Ω and field winding resistance (R_f) = 100Ω. [8]

4. a) What do you mean by excitation control in synchronous motor? How synchronous motor can be operated in leading and lagging pf mode? [8]

b) A 8-pole, 50Hz, 3-ph induction motor develops a starting torque of 50N-m. The rotor winding has an impedance of $(0.8 + j4)\Omega$ per phase. At what speed the motor will develop maximum torque and calculate the magnitude of maximum torque [8]

5. a) Why single phase induction motor are not self starting? Explain any two starting methods for single phase induction motor. [8]

38

2068 Magh

Exam	2068 Magh	Full Marks	20
Level	BEX, OCT, BME, BIE	Pass Marks	12
Programme	IT / IT	Time	3 hrs

Subject: Electrical Machine

- ✓ Candidates are required to give their answers in their own words as far as practicable.
- ✓ Attempt any Five questions.
- ✓ The figures in the margin indicate Full Marks.
- ✓ Assume suitable data if necessary.

1. a) Explain the working principle of a single phase induction motor. What is the effect of air gap in the magnetic circuit? [5+3]

b) A cast steel ring has a circular cross section of 3cm in diameter and mean circumference of 80cm. A 1mm air-gap is cut in the ring which is wound with a coil of 600 turns. Estimate the current required to establish a flux of 0.75 mWb in the air-gap. [8]

Magnetization data:

H (AT/m)	200	400	600	800	1000	1200	1400	1600
B(T)	0.1	0.32	0.6	0.9	1.08	1.18	1.27	1.32

2. a) Explain the transformer on load and no load with the phasor diagram of resistive and capacitive load. [8]

b) Test data on a 1- ϕ , 250/500V, 50Hz transformer are: [8]

O.C. Test: 250V, 1A, 80W (carried on L.V. Side)

S.C. Test: 20V, 12A, 100W (carried on H.V. side)

Then draw the equivalent circuit referred to primary side and find out the output power to obtain maximum efficiency at 0.9 lag p.f. *more*

3. a) A 500-KVA, 3- ϕ , 50Hz transformer has a voltage ratio (line voltage) of 33/11KV and is delta/star connected. The resistances per phase are: High voltage 35 Ω , low voltage 0.876 Ω and the iron loss is 3050W. Calculate the value of efficiency at full-load and one-half of full-load respectively at 0.8 p.f. [8]

b) Why the dc motor draws large current at starting? Justify it clearly and also describe the working of 3-point dc motor starter. [3+5]

4. a) A short shunt compound generator delivers a current of 80A to the load at 220V. The shunt field, series and armature winding resistances are 100 Ω , 0.05 Ω and 0.1 Ω respectively. Calculate the emf generated by the armature. [8]

b) Draw and explain torque-slip characteristics of 3- ϕ induction motor, showing clearly the starting torque, maximum torque and normal operating region. [8]

5. a) A 208V, 60 Hz, 4 pole, 3- ϕ induction motor has a full-speed of 1755 rpm. [8]
Calculate: (i) asynchronous speed, (ii) the slip and (iii) rotor frequency.

✗ Write down the criteria for synchronizing two 3- ϕ alternators with the detail explanation. [8]

6. Write short notes on: [4+4]

- a) Capacitor starting of 1- ϕ induction motor
- b) Armature reaction in dc machine
- c) Eddy current loss
- d) Starting methods of synchronous motor